


Unigrip

Electro-magnetic chucks with continuous transverse poles

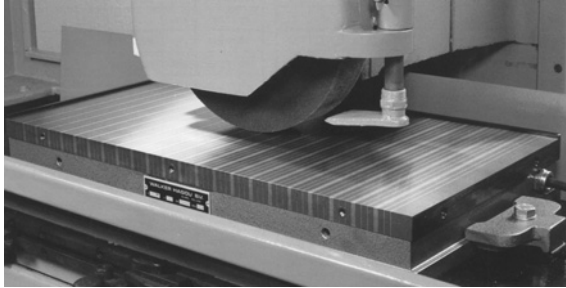

Standard voltage: 110Vdc
Controls: VUE-series

Maximum productivity

- Full magnetic surface
- Possibility to combine several chucks for a large uninterrupted surface
- Low profile for more wheel head clearance

Maximum accuracy

- Low power consumption, little temperature rise
- Solid, single piece housing
- Rigid top plate with brass separators
- State of the art pole division

| Code | Length | Width | Height | Weight[kg] | Power[W] | Code | Length | Width | Height | Weight | Power[W] |
|-----------|--------|-------|--------|------------|----------|-----------|--------|-------|--------|--------|----------|
| 46.77.164 | 500 | 300 | 73 | 90 | 100 | 46.77.326 | 800 | 500 | 73 | 210 | 245 |
| 46.77.166 | 600 | 300 | 73 | 108 | 130 | 46.77.328 | 900 | 500 | 73 | 236 | 345 |
| 46.77.168 | 700 | 300 | 73 | 125 | 170 | 46.77.330 | 1000 | 500 | 73 | 262 | 311 |
| 46.77.170 | 800 | 300 | 73 | 144 | 150 | 46.77.334 | 1200 | 500 | 73 | 348 | 443 |
| 46.77.172 | 900 | 300 | 73 | 162 | 205 | 46.77.335 | 1250 | 500 | 73 | 362 | 425 |
| 46.77.174 | 1000 | 300 | 73 | 180 | 185 | 46.77.340 | 1500 | 500 | 83 | 434 | 552 |
| 46.77.184 | 1500 | 300 | | | | 46.77.350 | 2000 | 500 | 83 | 578 | 620 |
| 46.77.244 | 600 | 400 | 73 | 122 | 200 | 46.77.404 | 800 | 600 | | | |
| 46.77.246 | 700 | 400 | 73 | 142 | 258 | 46.77.408 | 1000 | 600 | 73 | 325 | 306 |
| 46.77.247 | 750 | 400 | 73 | 153 | 240 | 46.77.412 | 1200 | 600 | 73 | 430 | 430 |
| 46.77.248 | 800 | 400 | 73 | 163 | 226 | 46.77.413 | 1250 | 600 | | | |
| 46.77.250 | 900 | 400 | 73 | 183 | 310 | 46.77.418 | 1500 | 600 | 83 | 538 | 540 |
| 46.77.252 | 1000 | 400 | 73 | 203 | 280 | 46.77.428 | 2000 | 600 | 83 | 717 | 607 |
| 46.77.256 | 1200 | 400 | 73 | 270 | 404 | 46.77.481 | 750 | 700 | | | |
| 46.77.262 | 1500 | 400 | 73 | 337 | 428 | 46.77.496 | 1500 | 700 | | | |
| 46.77.322 | 600 | 500 | 73 | 157 | 210 | 46.77.522 | 750 | 750 | | | |