



OUTLOCK & SETLOCK

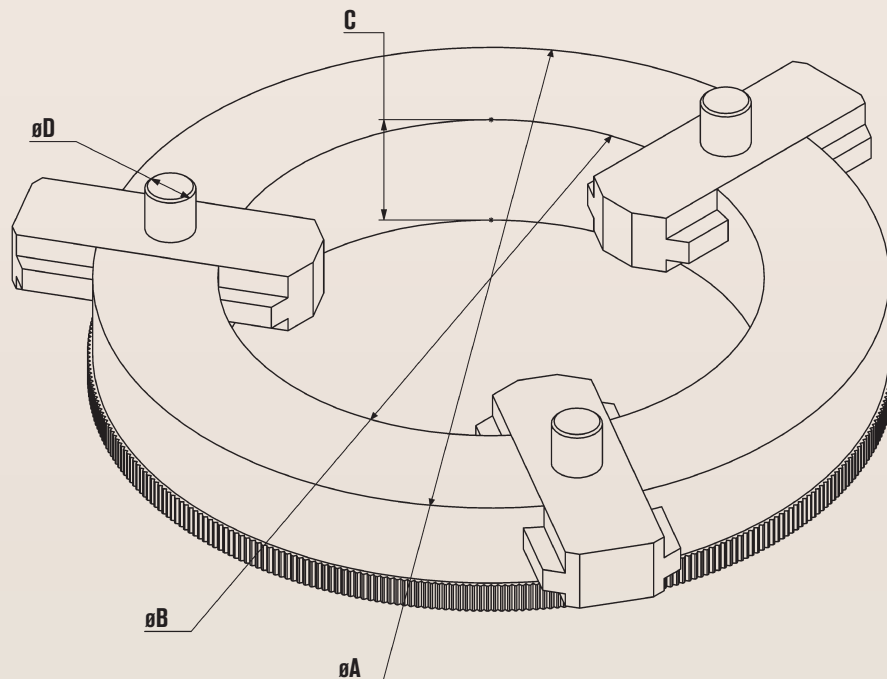


DIMENSIONER (mm)

Art. nr	øA	øB	C	øD	Användningsområde		Vikt	Max Spännkraft	Rekommenderad chuckdiameter
					Normal uppsp.	Omvänd uppsp.			
Outlock 400	82	31	24	10	1-31mm	90-115mm	1kg	23,5kN	upp till ø140mm
Outlock 450	158	107	24	10	1-107mm	159-220mm	2kg	23,5kN	upp till ø180mm
Outlock 500	218	138	30	13	1-138mm	219-295mm	6kg	23,5kN	ø200-300mm
Outlock 525 NC	255	150	34	16	1-150mm	256-345mm	9kg	127,5kN	ø200-330mm
Outlock 550	300	219	30	13	1-219mm	301-377mm	8kg	23,5kN	ø300-400mm
Outlock 575 NC	415	300	34	17	1-300mm	415-700mm	17kg	127,5kN	ø300-450mm

SETLOCK 50 & 50 NC

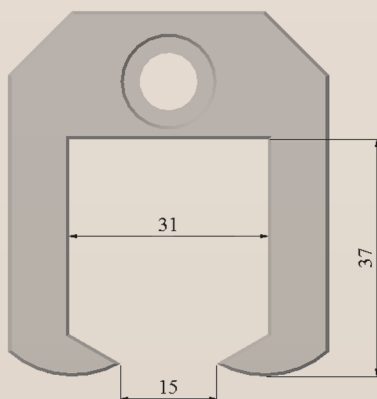

SETLOCK 75 & 75 NC

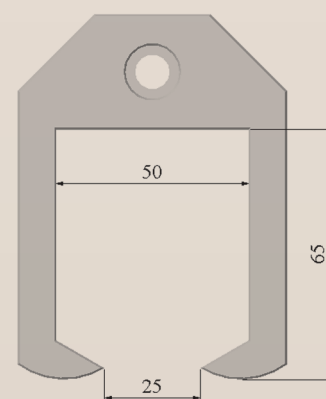

SETLOCK MODELLER

Art. nr	för
Setlock 50	Outlock 500 och 550
Setlock 50 NC	Outlock 525 NC
Setlock 75	Outlock 500 och 550
Setlock 75 NC	Outlock 525 NC

TILLBEHÖR